

Harvest the Sunshine


JA SOLAR

740W



JAM66D46 LB n-type Double Glass Bifacial Modules

Premium Cells



MBB Half-Cell
Technology

26%
Up To

Cell Conversion
Efficiency

Premium Modules



Higher power
generation better LCOE




n-type with very
Lower LID



Better Temperature
Coefficient



Better low irradiance
response

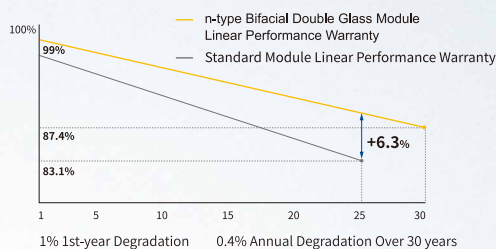


12-year product
warranty

30-year linear power
output warranty

Comprehensive Certificates


- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing

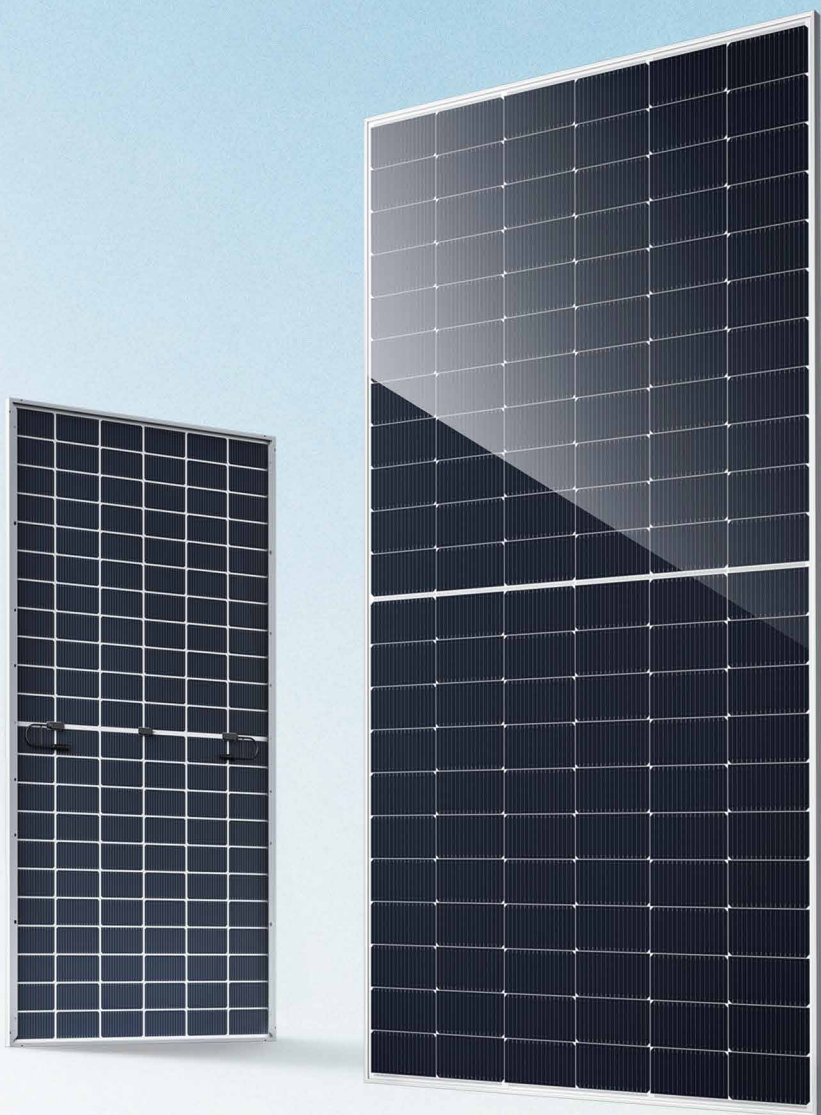

DEEP BLUE 4.0 Pro

JAM66D46 LB

n-type Double Glass Bifacial Modules

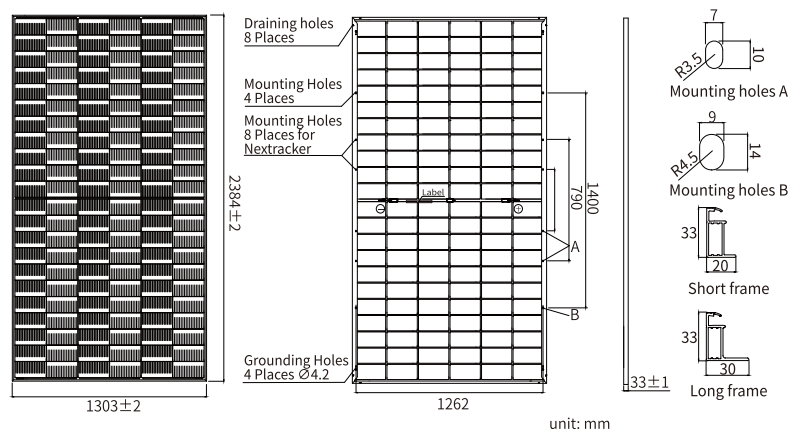

MECHANICAL PARAMETERS

Cell	Mono
Weight	38.2kg
Dimensions	2384±2mm×1303±2mm×33±1mm
Cable Cross Section Size	4mm²(IEC), 12 AWG(UL)
No. of cells	132(6×22)
Junction Box	IP68, 3diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 400mm(+)/200mm(-) Landscape: 1400mm(+)/1400mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	33pcs/Pallet, 594pcs/40HQ Container

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC

TYPE	JAM66D46 -715/LB	JAM66D46 -720/LB	JAM66D46 -725/LB	JAM66D46 -730/LB	JAM66D46 -735/LB	JAM66D46 -740/LB
Rated Maximum Power(P _{max}) [W]	715	720	725	730	735	740
Open Circuit Voltage (V _{oc}) [V]	48.80	49.00	49.20	49.40	49.60	49.80
Maximum Power Voltage(V _{mp}) [V]	41.00	41.19	41.39	41.58	41.77	41.96
Short Circuit Current(I _{sc}) [A]	18.55	18.59	18.63	18.67	18.70	18.73
Maximum Power Current(I _{mp}) [A]	17.44	17.48	17.52	17.56	17.60	17.64
Module Efficiency [%]	23.0	23.2	23.3	23.5	23.7	23.8
Power Tolerance	0~+3%					
Temperature Coefficient of I _{sc} /α _{Isc}	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.250%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.290%/°C					
STC	Irradiance 1000W/m², cell temperature 25°C, AM1.5G					


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

TYPE	JAM66D46 -715/LB	JAM66D46 -720/LB	JAM66D46 -725/LB	JAM66D46 -730/LB	JAM66D46 -735/LB	JAM66D46 -740/LB
Rated Max Power(P _{max}) [W]	772	778	783	788	794	799
Open Circuit Voltage(V _{oc}) [V]	48.80	49.00	49.20	49.40	49.60	49.80
Max Power Voltage(V _{mp}) [V]	41.00	41.19	41.39	41.58	41.77	41.96
Short Circuit Current(I _{sc}) [A]	20.03	20.08	20.12	20.16	20.20	20.23
Max Power Current(I _{mp}) [A]	18.84	18.88	18.92	18.96	19.01	19.05
Irradiation Ratio (rear/front)	10%					

* For NextTracker installations, maximum static load please take compatibility approve letter between JA Solar and NextTracker for reference.

CHARACTERISTICS

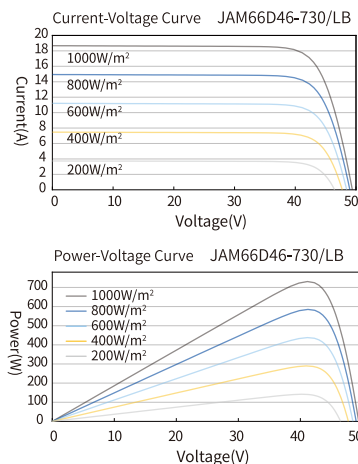

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	35A
Maximum Static Load, Front*	5400Pa(112 lb/ft²)
Maximum Static Load, Back*	2400Pa(50 lb/ft²)
NOCT	45±2°C
Bifaciality	80%±5%
Safety Class	Class II
Fire Performance	UL Type 29/Class C